



LP Series - Analog is a surface mountable pressure sensor package with a compensated analog output suitable for **ultra-low pressure sensing applications**.

COMPANY: Merit Sensor is a leader in piezoresistive pressure sensing and partners with clients to create high performing solutions for a variety of applications and industries.

SENTIUM: Merit Sensor products incorporate a proprietary Sentium® technology developed to provide superior stability.

TECHNOLOGY: Merit Sensor utilizes a piezoresistive Wheatstone bridge in a design that anodically bonds glass to a chemically etched silicon diaphragm. All products are RoHS compliant.

CAPABILITIES: Merit Sensor designs, engineers, fabricates, dices, assembles, tests and sells die and packaged products from a state-of-the-art facility near Salt Lake City, Utah



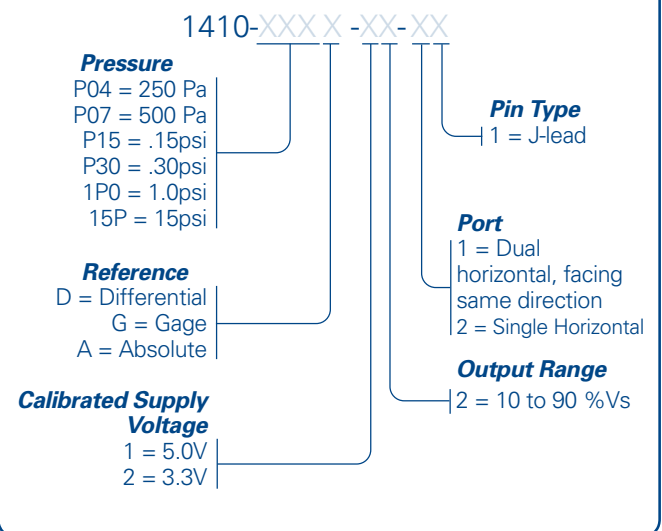
FEATURES

Pressure Range	0.04 to 15 psi (2.5 mbar to 1 bar; 250 Pa to 100 kPa; 1 in H ₂ O to 415 in H ₂ O)
Output	Amplified Analog
Type	Gage, Differential and Absolute
Media	Clean, Dry Air and Non-corrosive Gases
Packaging	Tape and Reel
Customization	Supply Voltage, Temperature Calibration Range, Output Range, Accuracy Specification, Update Rate, etc.

BENEFITS

Performance	Enjoy best-in-class performance due to Merit's proprietary Sentium technology
Cost	Save money over time with high-performing die
Security	Feel confident doing business with an experienced company backed by a solid parent company (NASDAQ: MMSI)
Speed	Get to market quickly with creative and flexible solutions
Service	Experience prompt, personal and professional support

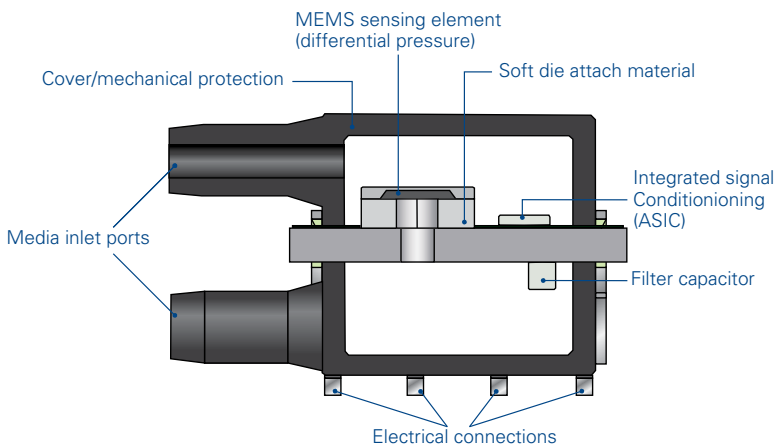
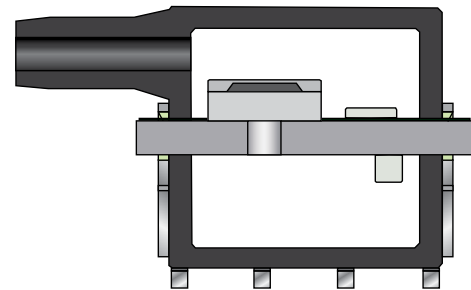
1410 Family Part Number Configurator



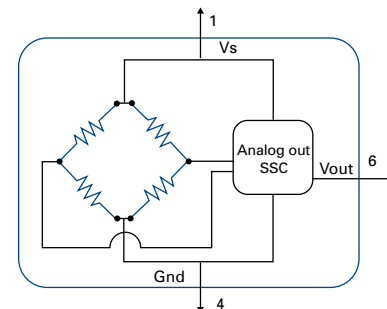
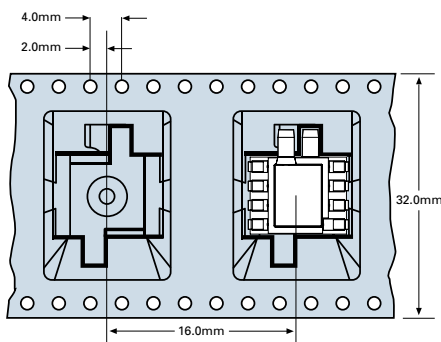
SPECIFICATIONS

Parameter	Minimum	Typical	Maximum	Units	Notes
Electrical					
Supply Voltage (Vs)	4.5	5	5.5	V	Depending on calibrated supply voltage
Supply Voltage (Vs)	3.0	3.3	3.6	V	
Supply Current	1.25	2	2.4	mA	(1)
Output Current			1.9	mA	
Min Output Load Resistance	5			kΩ	(2)
Operating Temperature	-40		85	°C	
Storage Temperature	-55		100	°C	
Performance					
DAC Resolution			12	Bit	
Ratiometric Output Range (Vout)		10 to 90		%Vs	
Accuracy	-1.5		1.5	%FS	(3) (4)
Lifetime Drift	-0.5		0.5	%FS	
Startup Time		6		ms	Depending on the part configuration
Analog Update Time		25		ms	Depending on the part configuration
Proof Pressure	5X				(5)
Burst Pressure	10X				
Transfer Function Formula					
$P_{psi} = (P_{max} - P_{min}) \cdot \left(\frac{V_{out} - V_{min}}{V_{max} - V_{min}} \right) + P_{min}$				Where <i>P_{psi}</i> = Measured Pressure in PSI <i>P_{Max}</i> = Maximum Pressure <i>P_{Min}</i> = Minimum Pressure <i>V_{min}</i> = Minimum Volatage (Usually 10% Vs) <i>V_{max}</i> = Maximum Volatage (Usually 90% Vs) <i>V_{out}</i> = Output voltage (pin 6)	
Media Compatibility					
For Use With Non-corrosive Dry Gasses					
Solder temperature: max 250 °C, 5 seconds max					

Notes:
 (1) @ 5V input voltage
 (2) Must be added at the point of use
 (3) Over 0°C to 60°C
 (4) Applicable if Vs = ±5% of calibrated supply voltage
 (5) Full scale pressure

CROSS SECTION FOR DIFFERENTIAL AND GAGE

CROSS SECTION FOR ABSOLUTE

ELECTRICAL

Note: Power supply decoupling and output filtering included


PACKAGING AND SHIPPING


DIMENSIONS FOR STANDARD OPTIONS (in millimeters)

Dimensions for reference only. Engineering drawings (with tolerance) available upon order.

Device Pinout
P1 = Vs

P2 = N/C

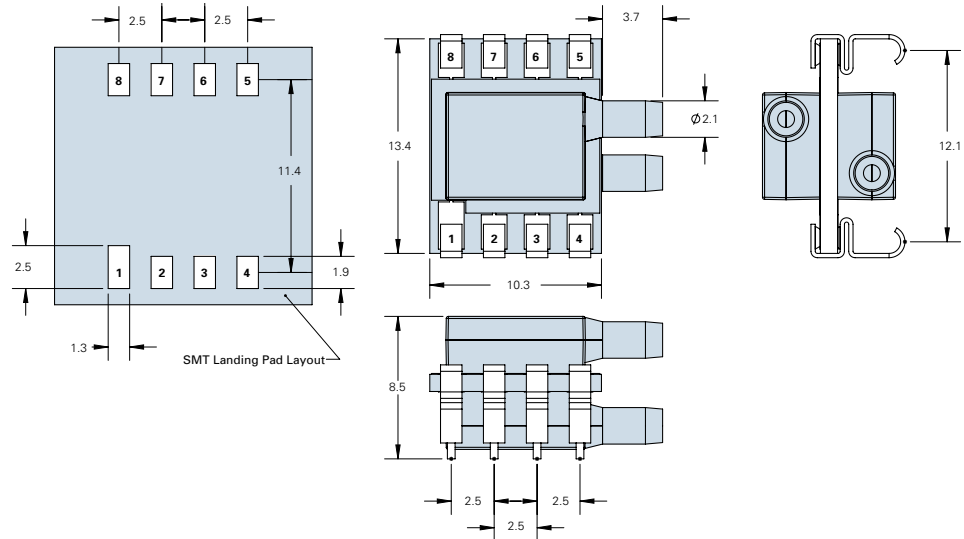
P3 = N/C

P4 = Ground

P5 = N/C

P6 = Vout

P7 = N/C

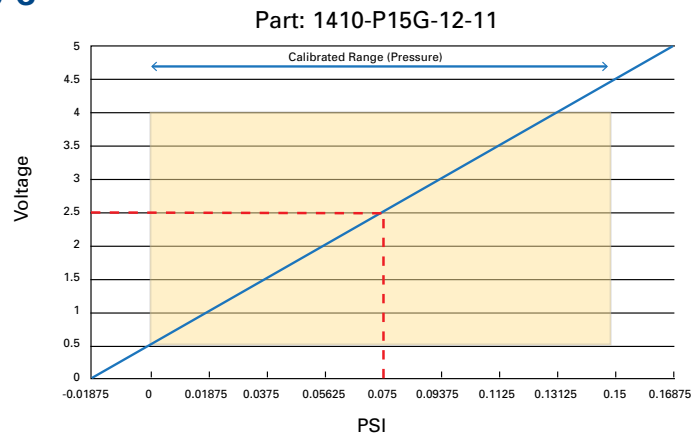
P8 = N/C

Example 1: 0.0 to 0.15 PSI Gage 0-60°C

Part: 1410-P15G-12-11

 $P_{min} = 0.0 \text{ psi}$, $P_{max} = 0.15 \text{ psi}$
 $V_{out} = 2.5 \text{ V}$
 $V_{minCompV} = 0.5 \text{ V}$, $V_{maxCompV} = 4.5 \text{ V}$

$$P_{psi} = (P_{max} - P_{min}) \cdot \left(\frac{V_{out} - V_{min}}{V_{max} - V_{min}} \right) + P_{min}$$

$$PSI = (0.15 - 0.0) \cdot \left(\frac{2.5 - 0.5}{4.5 - 0.5} \right) + 0$$

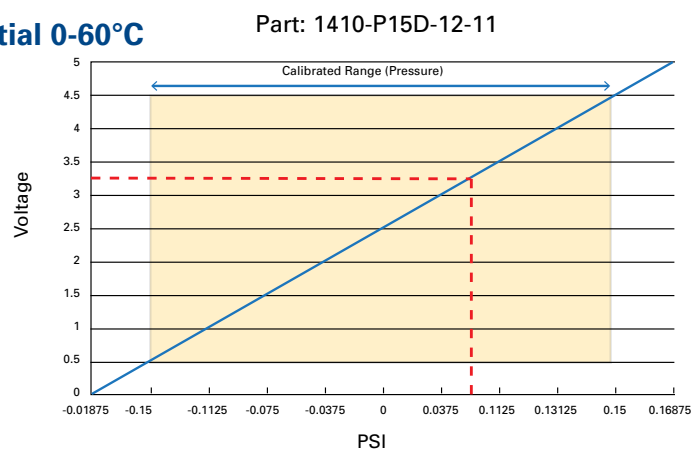
 $PSI = .075$

Example 2: -0.15 to 0.15 PSI Differential 0-60°C

Part: 1410-P15D-12-11

 $P_{min} = -0.15 \text{ psi}$, $P_{max} = 0.15 \text{ psi}$
 $V_{out} = 3.25 \text{ V}$
 $V_{minCompV} = 0.5 \text{ V}$, $V_{maxCompV} = 4.5 \text{ V}$

$$P_{psi} = (P_{max} - P_{min}) \cdot \left(\frac{V_{out} - V_{min}}{V_{max} - V_{min}} \right) + P_{min}$$

$$PSI = (0.15 - (-0.15)) \cdot \left(\frac{3.25 - 0.5}{4.5 - 0.5} \right) + (-0.15)$$

 $PSI = .05625$




Merit Sensor is based in Salt Lake City, Utah

