


MeriTREK – TR Evaluation Kit A convenient solution to quickly assess the TR Series pressure sensor

FEATURES

- Stainless steel housing (1/4»NPT connection)
- TR-Series face seal ready
- Easy to handle (fixing screw)
- Valid reliability test support
- Suggested temperature range : 0..85°C
- 1..35bar gage/absolute pressure range supported (TR-Series)
- HNBR O-ring (interchangeable for different media)
- TR-Series final application design-in suggestion (sealing)
- Enjoy all TR-Series features without any external components
- TR-Series TR1-0100A-001 (included)

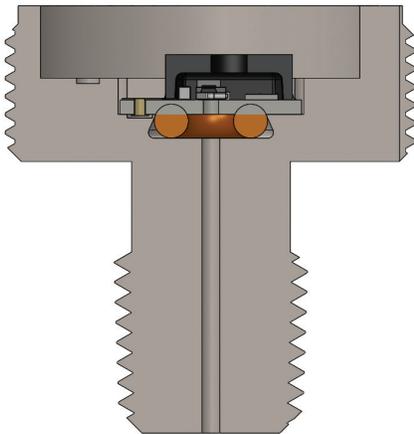

TR inside fitting




The TR Series pressure sensor is a rugged, direct-media pressure monitoring solution designed for today's toughest pressure sensing environments.

The TR Series pressure transducer is a fully compensated, amplified output pressure sensor package combining Merit Sensor's Sentium process harsh media MEMS piezoresistive die with state-of-the-art pressure sensor ASIC signal management.



TR1-0100A-001

Standard Face Seal

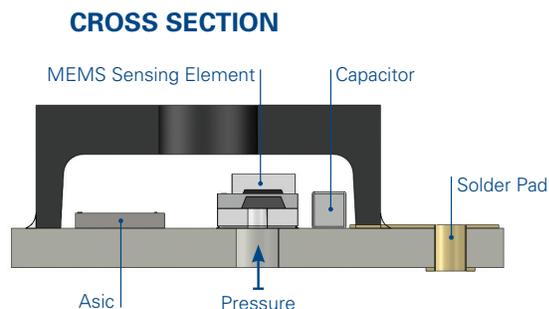

CROSS SECTION

Features	Min.	Typ.	Max.	Unit	Notes
Electrical					
Supply Voltage (Vdd)	4.5	5	5.5	Volts	
Supply Current			10	mA	
Output Current			2.5	mA	
Short Circuit Current	-25		25	mA	
Reverse Polarity Protection	-33			Volts	Device will cease operation during supply voltage fault.
Overvoltage Protection			33	Volts	Device will cease operation during supply voltage fault.
ESD	>4			kV	Human body model 1.5kOhm/100pF.
Performance					
Output Range (Vout)	10		90	%Vdd	
Resolution		0.03		%FS	12 bit DAC
Accuracy					Accuracy includes all error for hysteresis and linearity over the entire operating temperature range. It does not include lifetime drift. -40°C to 150°C. 1% accuracy is only available for parts > 100psi.
Standard	-2.5	0	2.5	% FS	
High Performance	-1.0	0	1.0	% FS	
Static Proof Pressure		2X FS		PSIA	
Burst Pressure		3X FS		PSIA	
Failed Low		< 9		%Vdd	
Failed High		> 91		%Vdd	
Lifetime Drift			0.5	%FS	
Repeatability			0.25	%FS	
Environmental					
Operating Temperature	-40		150	°C	
Storage Temperature	-55		150	°C	
Weight		1.08		Grams	